



POWER SUPPLY UNIT


MODEL : SU1503

GENERAL SPECIFICATION
GS. NO. GEF203E-1

■ GENERAL

The power supply unit furnishes required DC power to the pulse generator, transmitter, etc. of a variety of flowmeters.

■ CONSTRUCTION

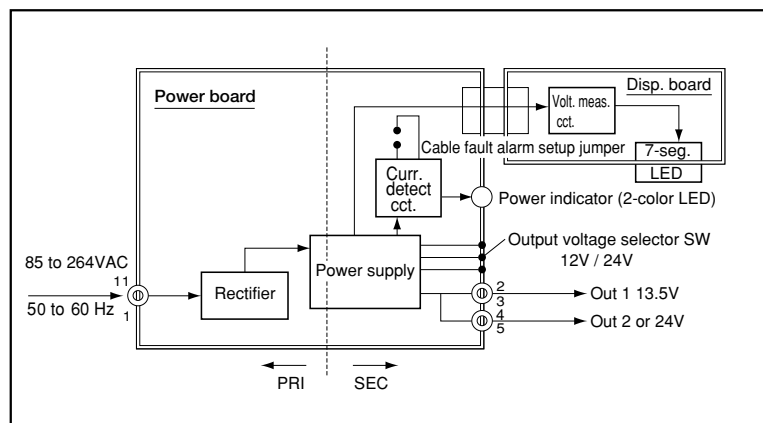

■ GENERAL SPECIFICATIONS

Item		Description		
Output	Power for pulse generator across ②—③ across ⑤—④	Output Level	12VDC	13.5VDC ±10%
			24VDC	24.0VDC ±10%
		Max. Current		500mA
		Ripples		50 mV p-p max.
		Protection		Retains output drop.
Display		7-seg. LED (3-digit) Accuracy: ±0.5V with respect to output voltage		
Cable fault alarm		Power indicator (2-color LED) Normal: GRN Fault: RED Detect. threshold: 10mA app. Alarm OFF (disabled) selectable Default: OFF		
Power supply		85 to 264VAC 50／60Hz		
Power consumption		Max. 20W (50VA)		
Ambient temperature		－10 to ＋50℃		
Insulation resistance		Power terminals – Output terminals in a lump		10 MΩ min. (500 V DC Mega)
Withstand voltage				2000VAC for one minute
Mounting		Plug-in type (Wall mount or installation on DIN rail)		
Enclosure		Flame-resistant plastic housing Resin molding, black		
Weight		350g		
Accessories		One front-connect 11-pin socket (Same as current SU series) One replacement fuse		


Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41


Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

■ OUTLINE DIMENSIONS

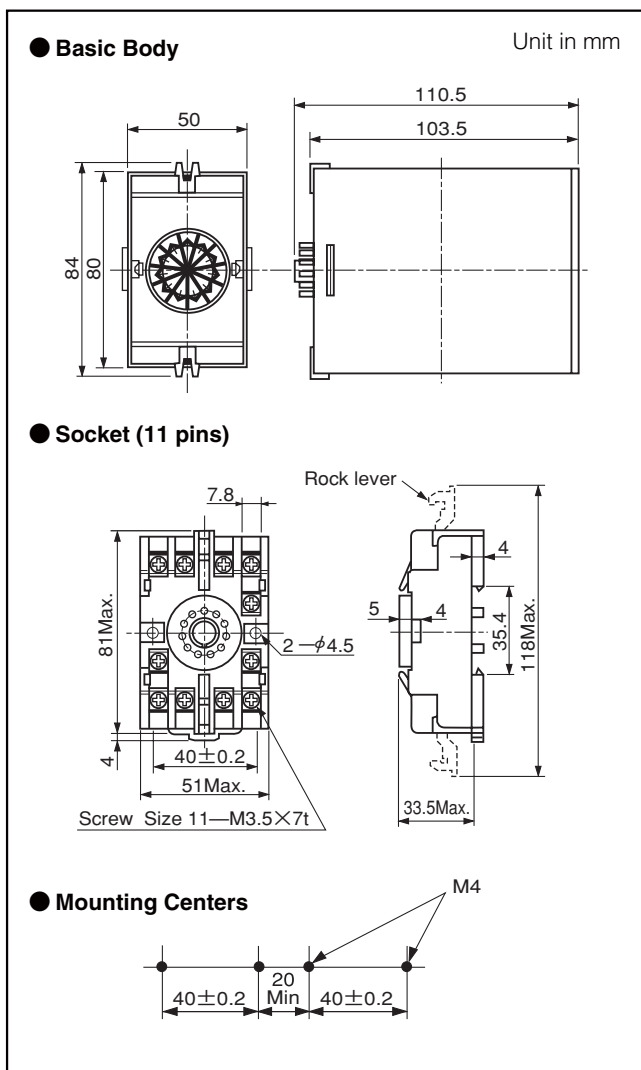

■ TERMINAL CONNECTIONS



85 to 264VAC

Power	H	11
85 to 264VAC	N	1
Output 1	+	2
	—	3
Output 2	+	5
	—	4

Setup conditions

- Output voltage spec.: Selects with front panel switch.
 - Cable fault alarm: Internal electronics "jumper"
- Shorted = Invalid
Open = Valid

■ When making inquiries, Please advise the following items:

- 1 : Product model number
- 2 : Type of instrument to be connected

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93